

RUGGED RELIABLE ACCURATE LIGHTWEIGHT



ECOM-B SERIES PORTABLE & AFFORDABLE

Building on the the ECOM tradition of excellence, we have spent years perfecting our technology and created the affordable ecom-B.

Now also available with attached printer and electronic condensate trap – the ecom-B Plus.



YOUR EVERYDAY EVERYWHERE ANALYZERS

German engineered and with the **strongest pump** in its class, the **ecom-B Series** delivers **instant and accurate** results each and every time!


These **light weight** analyzers come with a solid metal chassis which makes it your ideal choice for even the toughest environments.

ECOM-B & ECOM-B PLUS FEATURES

- UP TO 3 ELECTROCHEMICAL SENSORS
- SENSOR OPTIONS: O₂, CO & NO
- 7FT STANDARD SAMPLE LINE 9" PROBE
- CO PURGE PUMP TO PREVENT OVERSATURATION
- VISUAL OR ELECTRONICALLY MONITORED CONDENSATE TRAP
- FLUE GAS, AMBIENT & SENSOR TEMPERATURE
- ONBOARD CALCULATIONS FOR CO₂, EFFICIENCY, EXCESS AIR AND O₂ CORRECTION & NO_x
- INFRARED OR ON-BOARD PRINTER
- BLUETOOTH MODULE AVAILABLE

For more detailed information please visit www.ecomusa.com.

The **ecom-B Series** combines the performance of larger analyzers with the portability of a handheld.

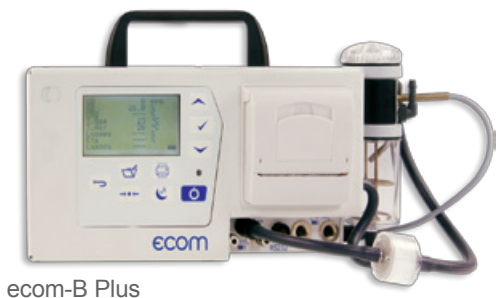

ecom-B Plus



ecom-B

RUGGED RELIABLE ACCURATE LIGHTWEIGHT

INTRODUCING THE ECOM-B SERIES

Ensuring that your equipment is safe and up to code is a necessary part of the job. ECOM makes it easy with our robust and affordable handhelds.

Quality and accuracy are our promise.

ECOM-B SERIES TECHNICAL SPECIFICATIONS

Measurements	Range	Accuracy	Resolution	Sensor***	Sensor type
Oxygen (O ₂)	0-21% vol	± 0.2% vol	0.1% vol	4-5 Years	Electrochemical
Carbon Monoxide (CO)	0-4000 ppm	±2% Measured*	1 ppm	6-8 Years	Electrochemical
Nitric Oxide (NO)	0-5000 ppm	±5% Measured*	1 ppm	6-8 Years	Electrochemical
Gas Temperature	32-1832° F**	±0.5%			
Ambient Temperature	40-122° F	±1° F	1° F		
Draft / Pressure	±40" H ₂ O	±2% Measured*	0.004" H ₂ O		
O ₂ Correction	0-20% O ₂	Calculated			
Carbon Dioxide	0-CO ₂ max	Calculated			
Efficiency (Eta)	0-99.9%	Calculated			
Excess Air (Lambda)	1-Infinity	Calculated			
Losses	0-99.9%	Calculated			

* Accuracy: When calibrated prior to use per ECOM America, Ltd. specifications.

** Probe dependent

*** Sensor life will vary due to frequency of use and application

ELECTRICAL

Battery life: 3-5 hour,
6V 3.3Ah Li-ion

Pump: Flow rate up to 1.0 lpm

Display: Backlit with 8 line display

DIMENSIONS

7.5" x 4.75" x 2.5" (ecom-B)

7' sample line with 9" probe

11.8" x 6.4" x 3.1" (ecom-B Plus)

9' sample line with 1' probe

2.5 to 3.6 lbs. weight

CONTACT US

ECOM America, Ltd.
1628 Oakbrook Drive
Gainesville, GA 30507

Toll Free: 1-877.326.6411
Tel: 770.532.3280
ecom.info@ecomusa.com

For more detailed information please visit www.ecomusa.com.



NEED BOTH HANDS?

Industrial magnets on the back of the analyzer allow for hands-free operation.



SAFETY

Purge pump for CO sensor

Fresh air purge upon shut-down

Expandable condensate filter or
electronic condensate trap

**ECOM accuracy is now
available in two robust
and affordable handhelds.**